


# ELECTRONIC CONTACT CLEANER & PROTECTANT



## EL™ 2001

-  For use on Electrical Circuitry
-  Dielectric strength value: 36,700 volts
-  NSF® Registered; K2 Rated (Solvents for cleaning electronic instruments) (Reg# 115081)
-  Non-flammable
-  Will not harm plastic
-  KB Solvency Strength (higher value, stronger the solvent): 129
-  HMIS Hazard Rating: Health (2) • Flammability (0) • Reactivity (0)

- Protects against corrosion
- Dielectric strength: 36,700 volts
- Low-conductivity
- Eliminates noise due to dust and dirt



PRESERVE. PROTECT. PREVENT.™

Sprayon® EL™ 2001 Electronic Contact Cleaner & Protectant is intended to clean and/or degrease electrical equipment when electrical current exists or when there is a residual electrical potential from a component, such as a capacitor. Instant solvent and cleaning action quickly removes greases, dust and oxidation. Restores and maintains precision and original efficiency of electronic instruments and electrical equipment. Penetrates pores of surface leaving a fine, microscopic film for protection against corrosion.

# ELECTRICAL & ELECTRONIC

## USES

- Switches
- Relays
- Timers
- Signals
- Transmitters
- Condensers
- Transistors
- Microphones
- Panel Boards
- Circuit Breakers
- Contacts
- Receivers
- Meters
- Coils

## APPLICATION

Product should be sprayed in a well-ventilated area. Works best at room temperature (70°F). Hold can in upright position for best spray pattern. Use extension tube for pinpoint application. NOTE: May harm certain plastics and elastomers. Test product on a non-essential similar material prior to application.

## PERFORMANCE

- EVAPORATION RATE: Fast  
KB VALUE (CLEANING POWER): 129  
DIELECTRIC STRENGTH: 36,700 volts  
PLASTIC SAFE: No
- NSF Registration Number 115081; K2 Rated
  - Protects against corrosion
  - Alternative to 1,1,1, Trichloroethene
  - Equipped with an extension tube for hard-to-reach areas

## PROPERTIES

- APPEARANCE: Clear Volatile Liquid  
ODOR: Strong  
PROPELLANT: CO<sub>2</sub>  
WT./GAL.: 12.08  
SPECIFIC GRAVITY: 1.45  
H.A.P.S. (HAZARDOUS AIR POLLUTANTS): No  
% VOC AEROSOL: 97.24%  
V.O.C. COMPLIANT CALIFORNIA: Yes  
V.O.C. COMPLIANT OTC STATES: Yes  
FLAMMABLE: No  
FLASH POINT: None  
HAZARD RATING: 2, 0, 0  
SHELF LIFE: 3 years from date of manufacture

## PACKAGING

- STOCK #: S02001  
UPC Code: 0-75577-92001-3  
Fill Wt: 16 oz.  
Per Case: 12  
Carton Dimensions:  
L 11.13" x W 8.44" x H 8.38"

## SHIPPING


Refer to section 14 of the material safety data sheet for proper transport information and labeling.

## RESOURCES

- MSDS/EDS/PRODUCT DATA SHEETS: [sprayon.com](http://sprayon.com)  
CUSTOMER SERVICE: 1-800-777-2966  
TECHNICAL INFORMATION: 1-800-251-2486



EL2001

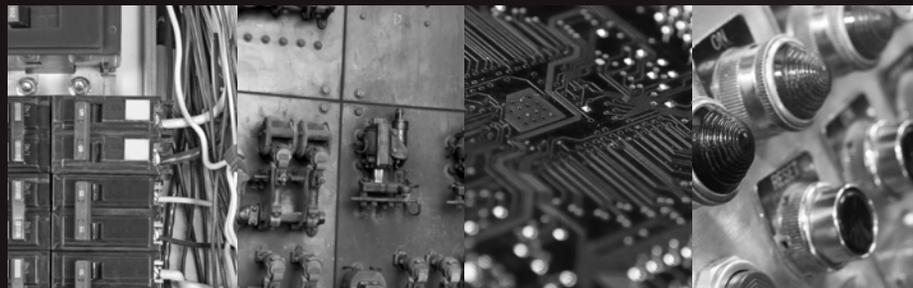

© 2010 Sprayon® Products Made in U.S.A.

Distributed by:

PRESERVE. PROTECT. PREVENT.



**Sprayon® Products**  
101 Prospect Ave. NW  
Cleveland, OH 44115  
[Sprayon.com](http://Sprayon.com)  
1-800-777-2966

310-PDS-EL2001