


CIRCUIT COOLER



EL™ 2003

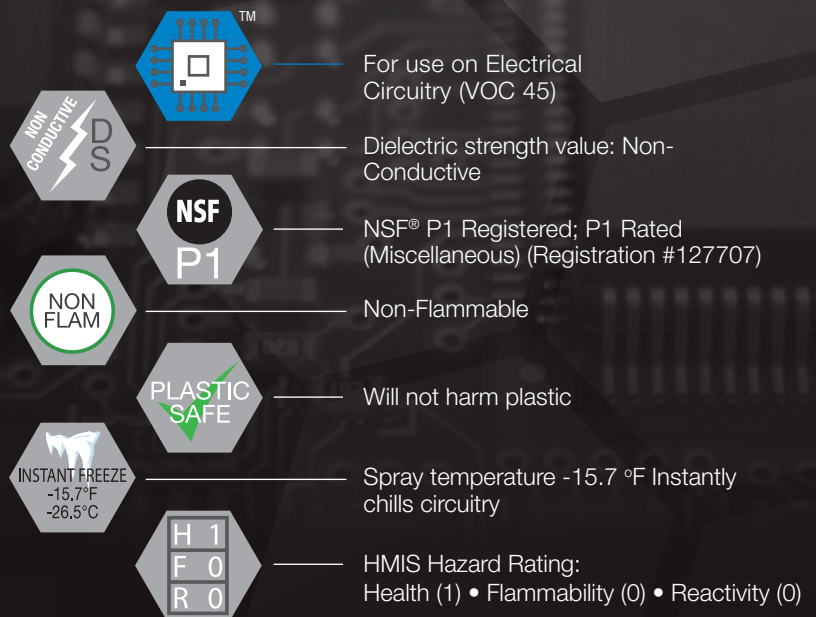

- Instant freeze to -15.7°F
- Detects hot spots
- Non-flammable
- No residue, high delivery valve



PRESERVE. PROTECT. PREVENT.™

Sprayon® EL™ 2003 Circuit Cooler instantly freezes small areas to -15.7°F to isolate thermal intermittent electronic components. Permits immediate detection of bad capacitor, transistors, oxidized joints and junctions. Meets performance requirements of MIL-BB-F-1421.

ELECTRICAL & ELECTRONIC

USES

- Speed solidification of molten solder to prevent movement during the soldering
- Locate hairline cracks in printed circuit boards
- Shrink-fit assemblies
- As a quick-freeze for laboratory use

APPLICATION

Spray in well-ventilated area. Sprays best at room temperature (70°F). Shake well before using.

PERFORMANCE

EVAPORATION RATE: N/A

KB VALUE (CLEANING POWER): N/A

DIELECTRIC STRENGTH: N/A

PLASTIC SAFE: Yes

- NSF Registration Number 127707; P1 Rated
- Meets MIL-BB-F-1421
- Equipped with an extension tube for hard-to-reach areas

PACKAGING

STOCK #: S2003C

UPC CODE: 0-75577-92003-7

FILL WT: 12 oz.

PER CASE: 12

CARTON DIMENSIONS:

L 11.25" x W 8.44" x H 7.50"

PROPERTIES

APPEARANCE: Clear Glass

ODOR: Odorless

PROPELLANT: 134A

WT./GAL.: 10.08

SPECIFIC GRAVITY: 1.21

H.A.P.S. (HAZARDOUS AIR POLLUTANTS): No

SARA 313 CHEMICALS: No

PROP 65: No

% VOC AEROSOL: 0%

V.O.C. COMPLIANT CALIFORNIA: Yes

V.O.C. COMPLIANT OTC STATES: Yes

FLAMMABLE: No

FLASH POINT: N/A

HAZARD RATING: 1,0,0

SHELF LIFE: 3 years from date of manufacture

RESOURCES

MSDS/EDS/PRODUCT DATA

SHEETS: sprayon.com

CUSTOMER SERVICE: 1-800-777-2966


TECHNICAL INFORMATION: 1-800-251-2486



EL2003

SHIPPING

Refer to section 14 of the material safety data sheet for proper transport information and labeling.

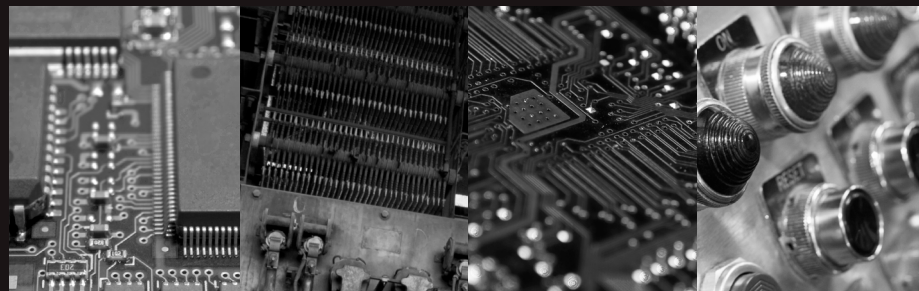

© 2010 Sprayon® Products Made in U.S.A.

Distributed by:

PRESERVE. PROTECT. PREVENT.



Sprayon® Products

101 Prospect Ave. NW
Cleveland, OH 44115
Sprayon.com
1-800-777-2966

310-PDS-EL2003