LUBRICANTS

011

Aceite de



NENTS UNDER PRESSURE VAPOR **jadvertenciai** contendo a fri el ete, sun and respiratory ojos, piel y vías respiratoras. UNC on back panel. PRECA

10 oz • 283g

FOOD GRADE MACHINERY



NSE

°F/°C 200/93

FRY Maquinaria de Calidad Para Alimentos

Light Pressure Lubricant

NSF[®] Registered; H2 Rated (Lubricants with no contact) (Registration # 115093)

Minimum - Maximum operational temperature range: Low 20°F (-40 °C) • High 450 °F (232 °C)


Flashpoint: 200 °F (93 °C)

HMIS Hazard Rating: Health (2) • Flammability (0) • Reactivity (0)

- Works on paint, metal, plastic, wood
- Silicone free formula
- 0 VOC

 $^{\circ}$

Meets FDA regulations

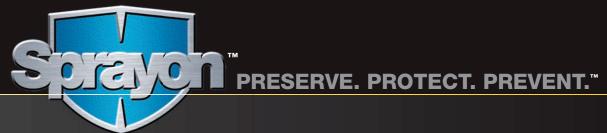

Sprayon[®] LU[™]700 Food Grade Machinery Oil is a general purpose lubricant that penetrates and loosens rust, dirt, scale, and corrosion. This non-silicone formula is excellent for use in areas where silicone overspray might interfere with carton sealing or capping operations. Sprayon® Food Grade Machinery Oil is virtually odorless, tasteless and colorless. NSF H1 rated.

USES

- Mixers
- Conveyors
- Valves
- Pistons
- Rollers
- Slides
- Cams
- Bottle and carton filling machinery
- Stainless steel pumps
- Chain drive belts
- Paste and sauce fillers

LUBRICANTS

APPLICATION

Maximum performance is achieved when the metal surfaces to be protected are clean, dry and free of rust, oil and mill scale. Product should be sprayed in a well ventilated area. Sprays best at room temperature (70F.) Shake well before using. Spray at a distance of 10" to 12" from surface.

PERFORMANCE

PLASTIC SAFE: Yes TEMPERATURE RANGE: LOW: 20°F HIGH: 450°F LOAD CAPACITY: Light • NSF Registration Number 115093; H1 Rated • Penetrant

- Rust Inhibitor
- Does not contain silicone.
- Will not harm paint, plastic, or wood surfaces.
- Non-gumming fluid at low temperatures.
- Virtually odorless, tasteless and colorless.

PROPERTIES

APPEARANCE: Light amber **ODOR:** Low odor **PROPELLANT: CO2** WT./GAL.: 6.7 **SPECIFIC GRAVITY: 0.81** PAINTABLE: No H.A.P.S. (Hazardous Air Pollutants): No SARA 313 Chemicals: No PROP 65: No % VOC AEROSOL: 0.00% V.O.C. COMPLIANT CALIFORNIA: Yes V.O.C. COMPLIANT OTC STATES: Yes FLAMMABLE: No FLASH POINT: >200°F HAZARD RATING: 2,4,0 SHELF LIFE: 3 years from date of manufacture

preserve. protect. prever:



LU700

© 2010 Sprayon[®] Products Made in U.S.A.

Distributed by:

PACKAGING

Stock #: S00700 UPC Code: 0-75577-90700-7 Fill Wt.: 10 oz. Per Case: 12 Carton Dimensions: L 10-7/8" x W 8-3/16" x H 8"

RESOURCES

MSDS/EDS/PRODUCT DATA SHEETS: sprayon.com CUSTOMER SERVICE: 1-800-777-2966 TECHNICAL INFORMATION: 1-800-251-2486

SHIPPING

Refer to section 14 of the material safety data sheet for proper transport information and labeling.







Sprayon[®] Products 101 Prospect Ave. NW Cleveland, OH 44115 Sprayon.com 1-800-777-2966