


ELECTRICAL DEGREASER

EL¹⁷49



- Alternative to 1,1,1 Trichloroethene
- For use on non-energized equipment
- Leaves no residue
- Dielectric strength 16,800 volts

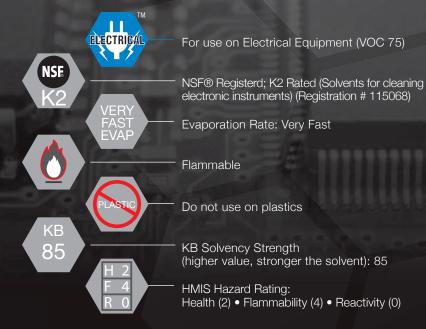

PRESERVE. PROTECT. PREVENT.

Sprayon® EL™749 Electrical Degreaser is a heavy duty cleaner which penetrates quickly to remove dirt, oil, grease, wax, and tar. Leaves no residue. Contains no Class I or Class II compounds. Dielectric strength of 16,800 volts. Aerosol is equipped with high delivery valve for cleaning efficiency and a extension tube for hard to reach areas.

ELECTRICAL & ELECTRONIC

Test product on non-essential similar material prior to application.

USES

- Relays Air tools
- Wire rope
 Gears
- · Molds · Sprockets
- Clutches
 Brakes
- · Dies · Locks
- · Generators · Chains
- Radar Equipment
- Air conditioners
- Electrical motors
- Material handling equipment

PERFORMANCE

APPLICATION

EVAPORATION RATE: Fast KB VALUE (Cleaning Power): 85 **DIELECTRIC STRENGTH: 16,800 volts**

PLASTIC SAFE: No

- NSF Registration Number 115068; K2 Rated
- Alternative to 1,1,1 Trichloroethene
- For use on non energized equipment
- Leaves no residue
- Meets California's Consumer Regulation (CONS-1) for Electrical Cleaner
- Equipped with an extension tube for hard-to-reach areas

PACKAGING

Stock #: S00749

UPC Code: 0-75577-90749-6

Fill Wt: 15 oz. Per Case: 12 **Carton Dimensions:**

L 10-7/8" x W 8-3/16" x H 9-5/8"

SHIPPING

Refer to section 14 of the material safety data sheet for proper transport information and labeling.

PROPERTIES

For food plant and other industrial use only. Avoid contamination of food during the use and stor-

age of this product. Spray in well ventilated area. Sprays best at room temperature (70°F). Shake

well before using. NOTE: Do not use on electrical equipment while in operation. Allow surface to dry completely before restart. May harm certain plastics, elastomers and air-dry painted surfaces.

APPEARANCE: Clear Volatile Liquid

ODOR: Sweet/Strong PROPELLANT: CO₂ WT./GAL.: 6.08

SPECIFIC GRAVITY: 0.73 % VOC AEROSOL: 45%

V.O.C. COMPLIANT CALIFORNIA: Yes V.O.C. COMPLIANT OTC STATES: Yes

FLAMMABLE: Yes FLASH POINT: 3°F **HAZARD RATING: 2,4,0**

SHELF LIFE: 3 years from date of

manufacture

RESOURCES

MSDS/EDS/PRODUCT DATA SHEETS: sprayon.com


CUSTOMER SERVICE: 1-800-777-2966 TECHNICAL INFORMATION: 1-800-251-2486





EL749

© 2010 Sprayon® Products Made in U.S.A.

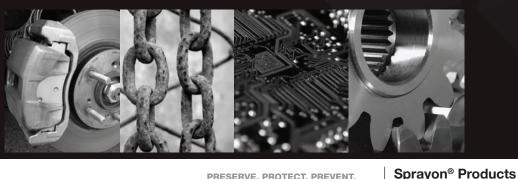

Distributed by:





101 Prospect Ave. NW Cleveland, OH 44115 Spravon.com 1-800-777-2966