


# PLASTICS SAFE CONTACT CLEANER



## EL™ 2020

-  For use on Electrical Circuitry
-  Dielectric strength value: 19,000 volts
-  NSF® Registered; K2 Rated (Solvents for cleaning electronic instruments) (Registration # 127506)
-  Non-flammable
-  Will not harm plastic
-  KB Solvency Strength (higher value, stronger the solvent): 56
-  HMIS Hazard Rating: Health (2) • Flammability (0) • Reactivity (0)

- Alternative to TF113®
- Dielectric strength: 19,000 volts
- Leaves no residue
- Very fast evaporation rate



Sprayon® EL™ 2020 Plastics Safe Contact Cleaner is a fast-evaporating, non-flammable electronic/electrical cleaner that leaves no residue. This alternative to TF113® is safe on all metals and most plastics. May be applied while equipment is operating. Equipped with extension tube for pinpoint application. Dielectric strength of 19,000 volts, makes EL™ 2020 Plastics Safe Contact Cleaner suitable for a wide range of applications.

# ELECTRICAL & ELECTRONIC

## USES

- Computer systems & memory devices
- Printed circuits
- Meters
- Satellite communications & radar equipment
- Vacuum tube parts
- Typewriters & office machines
- Hydraulic & missile fuel systems
- Relays & switches
- Electronic games (TV/radio)
- Timing devices
- X-ray equipment
- Cameras (movie & 35mm)
- Precision instruments
- Telephone switch gears
- Coin counters & chutes



EL2020

## APPLICATION

Product should be sprayed in a well ventilated area. Works best at room temperature (70°F). Hold can in upright position for best spray pattern. Use extension tube for pinpoint application.

## PERFORMANCE

- EVAPORATION RATE:** Very Fast  
**KB VALUE (Cleaning Power):** 56  
**DIELECTRIC STRENGTH:** 19,000 volts  
**PLASTIC SAFE:** Yes
- NSF Registration Number 127506; K2 Rated
  - Quick evaporating
  - No residue
  - Alternative to TF-113®
  - Equipped with an extension tube for hard-to-reach areas

## PACKAGING

**STOCK #:** S02020  
**UPC CODE:** 0-75577-02020-1  
**FILL WT:** 12 oz.  
**PER CASE:** 12  
**CARTON DIMENSIONS:**  
L 11.13" x W 8.44" x H 8.38"

## SHIPPING


Refer to section 14 of the material safety data sheet for proper transport information and labeling.

## PROPERTIES

- APPEARANCE:** Clear Volatile Liquid  
**ODOR:** Sweet/Strong  
**PROPELLANT:** 134A  
**WT./GAL.:** 11.16  
**SPECIFIC GRAVITY:** 1.34  
**H.A.P.S. (HAZARDOUS AIR POLLUTANTS):** No  
**SARA 313 CHEMICALS:** No  
**PROP 65:** No  
**% VOC AEROSOL:** 5%  
**V.O.C. COMPLIANT CALIFORNIA:** Yes  
**V.O.C. COMPLIANT OTC STATES:** Yes  
**FLAMMABLE:** No  
**FLASH POINT:** N/A  
**HAZARD RATING:** 2,0,0  
**SHELF LIFE:** 3 years from date of manufacture

## RESOURCES

- MSDS/EDS/PRODUCT DATA SHEETS:** [sprayon.com](http://sprayon.com)  
**CUSTOMER SERVICE:** 1-800-777-2966  
**TECHNICAL INFORMATION:** 1-800-251-2486

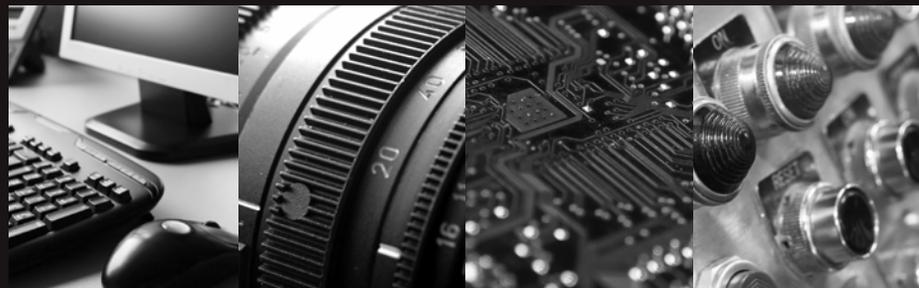

© 2010 Sprayon® Products Made in U.S.A.

Distributed by:

PRESERVE. PROTECT. PREVENT.



**Sprayon® Products**

101 Prospect Ave. NW  
Cleveland, OH 44115  
[Sprayon.com](http://Sprayon.com)  
1-800-777-2966

310-PDS-EL2020