



**SHERWIN
WILLIAMS.**

Industrial Wood Coatings

CC-F65

SHER-WOOD®

Kem Aqua® Plus White

Gloss WhiteM64W521
Mid Gloss White.....M64W522
Low Gloss White.....M64W523
Custom Blend.....M64PX Series

DESCRIPTION

SHER-WOOD® KEM AQUA® PLUS WHITE is a high quality water reducible pigmented white for finishing furniture, cabinets, and a wide variety of wood and novelty items. This high quality topcoat provides excellent appearance and performance over Sher-Wood® Kem Aqua® Plus Surfacer.

Advantages:

- Meets Kitchen Cabinet Manufacturers Association (KCMA) over Sher-Wood® Kem Aqua® Plus Surfacer.
- VOC as packaged <2.08 lb/gal, 250 g/L*
- Very good resistance to yellowing.
- Excellent hardness, block resistance and print resistance.
- Excellent mar resistance.
- Good flow and leveling.
- Better resistance to microfoaming than other latex coatings.
- Good flexibility – passes 20 KCMA Cold Check cycles.

Air Quality Data:

- Non-photochemically reactive
- Volatile Organic Compounds (VOC)
Theoretical as packaged, less water and exempt solvents <2.08 lb/gal, 250 g/L
- Volatile Hazardous Air Pollutants (VHAPS) as packaged, no reportable VHAPS

An Environmental Data Sheet is available from your local Sherwin-Williams facility or at www.paintdocs.com

*VOC compliance limits vary from state to state; please consult local Air Quality rules and regulations.


CHARACTERISTICS

Gloss: Gloss 70+ units
Mid Gloss 45-50 units
Low Gloss 20-25 units

Volume Solids: 31.0 ± 1%

Weight Solids: 42.0 ± 1%

Viscosity:
18-22 seconds #3 Zahn Cup

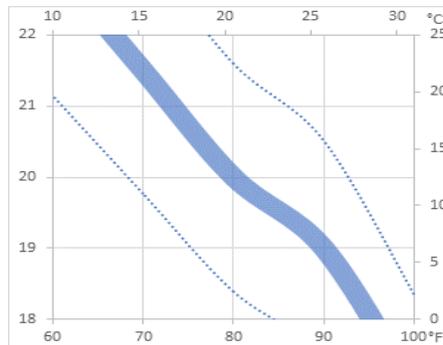

The above chart is for information only and should not be used as product specifications

Recommended film thickness:

Mils Wet 3.0 - 4.0 Mils

Dry 1.0 - 1.25 Mils

Spreading Rate (no application loss) 385-515 sq ft/gal @ 1.0-1.25 mils DFT

Drying (77°F, 50% RH):

To Touch: 15 minutes
To Handle: 20 minutes
To Sand: 22-25 minutes
To Recoat: 25 minutes
To Pack: 8-12 hours
Force Dry: 10-20 minutes at 120°F

This product dries primarily by water evaporation. Best drying occurs at 50% RH or lower and temperatures of 77°F or higher. Good air movement is essential for complete drying.

When humid shop conditions exist, lower relative humidity is achieved only by raising the temperature 10-30°F and ventilating out the excess moisture.

Flash Point: None

Package Life: 1 year, unopened, inside storage

Freeze/Thaw: 0 cycles

SPECIFICATIONS

Surface preparation:

Wood - New Work (interior only): Must be clean, dry, and finish sanded. Substrate should be free of grease, oil, dirt, fingerprints, and any contamination to ensure optimum adhesion and coating performance properties. Moisture content of wood should be 6 to 8%.

Previously finished wood (interior only): Strip old finishes completely and remove all contaminants from the surface. Make sure surface is dry. Finish as new work.

Wood Finishing System:

1. Seal—apply Sher-Wood Kem Aqua Plus Surfacer (E64W520) at 4.0-5.0 mils wet. Air dry with good air movement. Sand with 240 grit paper and remove all sanding dust.
2. Topcoat - apply topcoat Sher-Wood Kem Aqua Plus White at 3.0-4.0 mils wet. Dry with good air movement. Apply an additional topcoat for greater build and fill depth. Allow 30 minutes drying between coats.
3. Sher-Wood® Kem Aqua® Plus Clear (T75C555 series) can also be used as a final coat for additional performance properties.
4. Maximum dry film thickness of the system must not exceed 4 mils dry.

NOTE: Do not use Kem Aqua® Clear Lacquer over Kem Aqua® Plus Surfacer or Kem Aqua® Plus White. These systems are not compatible and will discolor. Kem Aqua® Plus Clear can be used as a final coat over Kem Aqua® Plus White.

Testing: The information, data, and recommendations set forth in this Product Data Sheet are based upon test results believed to be reliable. However, due to the wide variety of substrates, substrate properties, surface preparation methods, equipment and tools, application methods, and environments, the customer should test the complete system for adhesion, compatibility and performance prior to full scale application.

APPLICATION

Typical Setups

Reduction: Apply full body. If reduction is needed to optimize application, use up to 2% water. To ensure optimal performance and stability it is recommended to use deionized water for reduction. Product can be retarded with (DPM) Dipropylene Glycol Monomethyl Ether, or 2-Butoxyethanol (R6K25). Add up to 2% by volume under mechanical agitation. These solvents will also improve air release.

Conventional Spray:

Air Pressure..... 45-55 psi
Fluid Pressure 8-10 psi
Tip......055-.070

Airless Spray:

Pressure1500-1800 psi
Tip......013-.015

Air Assisted Airless:

Air Pressure..... 15-20 psi
Fluid Pressure400-700 psi
Tip......011-.013
Reducer..... water
Reduction Rate.....as needed up to 2%

HVLP:

Air Pressure..... 8-10 psi
Fluid Pressure 5-10 psi
Cap/Tip......055-.070

Some applications and equipment setups, especially air assisted airless and airless, may be prone to microfoaming of the wet film, which will give lower gloss and clarity. Do not use higher pressures than needed for atomization.

Clean-Up:

Flush spray equipment completely with water followed by flushing with a 2:1 blend of water and 2-Butoxyethanol (R6K25) to remove water residue and to prevent rusting.

ADDITIONAL INFORMATION

- Not recommended for exterior use.
- Use stainless steel spray equipment.
- Tank, piping and containers should be lined steel or plastic.
- Mix thoroughly prior to use. Avoid vigorous agitation, which may cause bubbling or foaming.
- Must not be exposed to freezing temperatures. Store inside.
- The customer is urged to pretest the system under shop conditions.
- Excessive wet film thickness (>4.0 mils wet) may sag.
- Maximum dry film thickness of coating system is 4.0 mils.
- Very low humidity may cause mud-cracking and poor film properties.
- When finishing Redwood, Red or White Oak, Pine and Cedar Wood. With water-based finishes, tannins may be extracted from the wood by the water and cause staining and/or discoloration. This tannin bleed is most evident with white topcoats. Sher-Wood Kem Aqua Plus Surfacer E64W520 must be used to prevent tannin discoloration.
- Products must be air dried at least overnight with good air movement before stacking or packing.
- May be tinted with up to 4 ounces of Kem Aqua® Colorants, ColorCast Ecotone® (CCE) or Blend-a-Color® (BAC) colorants per gallon.
- Do not blend in any ratio with Sher- Wood Kem Aqua Lacquer as they are incompatible.
- Sher-Wood Kem Aqua Plus Whites and Sher-Wood Kem Aqua Plus Clears may be blended together in any ratio to expand color capability.

All trademarks are the property of their respective owners.

CAUTIONS

FOR INDUSTRIAL SHOP APPLICATION ONLY

Thoroughly review product label and Safety Data Sheet (SDS) for safety information and cautions prior to using this product.

To obtain the most current version of the Environmental Data Sheet (EDS), Product Data Sheet (PDS), or Safety Data Sheet (SDS) please visit your local Sherwin-Williams facility or www.paintdocs.com.

Please direct any questions or comments to your local Sherwin-Williams facility.

Note: All purchases of products from Sherwin-Williams are exclusively subject to Sherwin-Williams' terms and conditions of sale which can be found [by following this link \(click here\)](#) Please review these terms and conditions prior to the purchase of the products.

Sherwin-Williams warrants the product to be free of manufacturing defect in accordance with Sherwin-Williams' quality control procedures. Except for the preceding sentence, due to factors that are outside of Sherwin-Williams' control, including substrate selection, and customer handling, preparation, and application, Sherwin-Williams cannot make any other warranties related to the product or the performance of the product. **SHERWIN-WILLIAMS DISCLAIMS ALL WARRANTIES OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE IMPLIED WARRANTY OF MERCHANTABILITY, THE IMPLIED WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE.**

Liability for products proven to be defectively manufactured will be limited solely to replacement of the defective product or the refund of the purchase price paid for the defective product, as determined by Sherwin-Williams. Under no circumstances shall Sherwin-Williams be liable for indirect, special, incidental or consequential damages, lost profits or punitive damages arising from any cause whatsoever.