



**SHERWIN
WILLIAMS.**

Industrial Wood Coatings

CC-F68

SHER-WOOD® KEM AQUA® *Plus* Waterborne Sealer

ClearT65F550
Custom Blend.....T65PX Series

DESCRIPTION

SHER-WOOD® KEM AQUA® Plus Waterborne Sealer is a water-based sealer developed to promote increased film clarity in systems sealed and topcoated with Sher-Wood water based products.

Advantages:

- Sher-Wood Kem Aqua Plus Waterborne Sealer yields the warm look of a solvent borne sealer when applied to bare or stained wood
- Excellent film clarity for increased grain definition
- User friendly - easy to handle
- Dries to handle and sand in 30 minutes at room temperature
- Minimizes tannin bleed discoloration when used with Sher-Wood Kem Aqua Plus Clear topcoat
- Good flow and leveling
- Reduces with water*
- Meets Kitchen Cabinet Manufacturers Association (KCMA) tests with Kem Aqua Plus Clear topcoat (T75C555 series)

Air Quality Data:

- Non-photochemically reactive
- Volatile Organic Compounds (VOC) theoretical as packaged maximum, less water and exempt solvents:
1.75 lb/gal, 210 g/L
- Volatile Hazardous Air Pollutants (VHAPS) as packaged:
No reportable VHAPS

An Environmental Data Sheet is available from your local Sherwin-Williams facility or at www.paintdocs.com.

*To ensure optimal coating performance and stability, it is recommended to use deionized water for reduction.


CHARACTERISTICS

Volume Solids: 30 ± 1%

Weight Solids: 34 ± 1%

Viscosity:

32-36 seconds #2 Zahn Cup

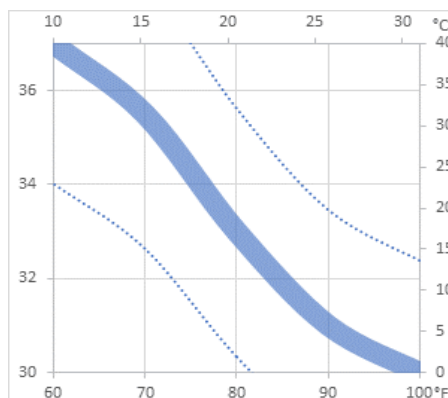

The above chart is for information only and should not be used as product specifications

Recommended film thickness:

Mils Wet 2.0 - 3.0
Mils Dry 0.7 - 1.0

Spreading Rate (no application loss): 465-710 sq ft/gal @ 0.7-1.0 mils DFT

Drying (77°F, 50% RH):

To Touch: 10 minutes
To Handle: 10-20 minutes
To Sand: 30 minutes
To Recoat: 30 minutes
Force Dry: 10-20 minutes at 120°F or equivalent

Sher-Wood Kem Aqua Plus Sealer dries primarily by water evaporation. Best drying occurs at relative humidity of 50% or lower and temperatures of 70°F (25°C) or higher. Good air movement is essential for complete dry.

Flash Point: None

Package Life: 1 year, unopened

Storage: Store inside - Protect from freezing

SPECIFICATIONS

Surface preparation

Wood - New Work (interior only):

Must be clean, dry, and finish sanded. Substrate should be free of grease, oil, dirt, fingerprints, and any contamination to ensure optimum adhesion and coating performance properties. Moisture content of wood should be 6 to 8%.

Previously finished wood (interior only):

Strip old finishes completely and remove all contaminants from the surface. Make sure surface is dry. Finish as new work

Testing: The information, data, and recommendations set forth in this Product Data Sheet are based upon test results believed to be reliable. However, due to the wide variety of substrates, substrate properties, surface preparation methods, equipment and tools, application methods, and environments, the customer should test the complete system for adhesion, compatibility and performance prior to full scale application.

APPLICATION

Typical Setups

Reduction: Apply full body. If needed, reduce up to 3% with water. To ensure optimal coating performance and stability, it is recommended to use deionized water for reduction. May be applied to warm substrate (120°F maximum).

Conventional Spray:

Air Pressure..... 45-55 psi

Fluid Pressure 8-10 psi

Air Assisted Airless:

Air Pressure..... 15-25 psi

Fluid Pressure 700-1000 psi

Cap/Tip011-.013"

HVLP:

Maximum Air at Cap 10 psi

Fluid Pressure 6-8 psi

Cleanup:

Clean mixing equipment with a 50/50 blend of Acetone (R6K9) or Diacetone Alcohol and water. A 50/50 blend of R6K34 PM Reducer and water can also be used for cleanup. **PM Reducer must be blended with water prior to flushing equipment. Full strength PM Reducer is not compatible with Sher- Wood Kem Aqua Plus Waterborne Sealer.**

Do not use with 2-Butoxyethanol (R6K25) or Butyl Carbitol.

Follow manufacturer's safety recommendations when using any solvent.

All trademarks are the property of their respective owners.

ADDITIONAL INFORMATION

- Not recommended for exterior use.
- Use stainless steel spray equipment. Tank, piping and containers should be stainless steel or plastic. T65F550 has a low pH and will corrode iron, zinc, and aluminum. It should not be allowed to come into contact with these metals or their alloys in storage tanks, piping, mixers or containers.
- Mix thoroughly prior to use. Avoid vigorous agitation which may cause bubbling or foaming.
- Must not be exposed to freezing temperatures. Store inside.
- The customer is urged to pretest the system under shop conditions.
- Natural finished woods (unstained) will change color on aging and exposure to light. This is a natural phenomenon. Clear finishes will not prevent the wood from changing color.
- Some applications and equipment setups, especially air assisted airless and airless, may be prone to microfoaming of the wet film which will give lower gloss and clarity. Do not use higher pressures than needed for atomization.
- To make toners and shading lacquers, add up to 2 oz/gal of KEM AQUA® Colorants.
- Cannot be blended with other products.
- **Not compatible with 2-Butoxyethanol (R6K25) or Butyl Carbitol. Do not use these solvents for cleanup or reduction.**

CAUTIONS

FOR INDUSTRIAL SHOP APPLICATION ONLY

Thoroughly review product label and Safety Data Sheet (SDS) for safety information and cautions prior to using this product.

To obtain the most current version of the Environmental Data Sheet (EDS), Product Data Sheet (PDS), or Safety Data Sheet (SDS) please visit your local Sherwin-Williams facility or www.paintdocs.com.

Please direct any questions or comments to your local Sherwin-Williams facility.

Note: Each purchase and/or use of products from Sherwin-Williams are exclusively subject to Sherwin-Williams' terms and conditions of sale which can be found here: www.sherwin-williams.com/terms-and-conditions#standard-tc

Please review these terms and conditions prior to each purchase and/or use of the products.

Sherwin-Williams warrants the product to be manufactured in accordance with Sherwin-Williams' quality control procedures. Except for the preceding sentence, **SHERWIN-WILLIAMS SPECIFICALLY DISCLAIMS ALL WARRANTIES OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE IMPLIED WARRANTY OF MERCHANTABILITY, THE IMPLIED WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE.**

Sherwin-Williams' liability for products will be limited solely to replacement of the defective product or the refund of the purchase price paid for the defective product, as determined by Sherwin-Williams. Under no circumstances shall Sherwin-Williams be liable for indirect, special, incidental, or consequential damages, lost profits or punitive damages arising from any cause whatsoever.