



**SHERWIN
WILLIAMS.**

Industrial Wood Coatings

CC-F52

SHER-WOOD® Acrylic Conversion Coating

GlossT77C60
Bright Rubbed EffectT77F61
Medium Rubbed EffectT77F62
Dull Rubbed EffectT77F63
CatalystV66V26

DESCRIPTION

SHER-WOOD® Acrylic Conversion Coating is a HAPS Free CAB-Acrylic catalyzed wood finishing system that features a water white clear finish with excellent non-yellowing properties, as well as a 6 month working potlife. It is recommended for clear coating pickled, light pastel, and natural unstained woods when resistance to discoloration and yellowing are required.

Advantages:

- Water white formulation containing UV Absorber for enhanced non-yellowing properties
- Precatalyzed coating with 6 months working potlife
- Ready to spray, no reduction required
- Meets the test requirements of the Kitchen Cabinet Manufacturers Association (KCMA) as a self sealed system or over catalyzed Sher-Wood Vinyl Sealers T67F3 or T67F6
- Fast dry to sand and quick early hardness characteristics
- HAPS FREE as packaged (as defined by the National Standards for Hazardous Air Pollutants [HAPS] Emissions for Wood Manufacturing Operations 40 CFR 63, Subpart JJ)
- May be applied by conventional, airless, air-assisted airless, or HVLP spray methods
- Good moisture, household chemical, and cold check resistance
- Ideal for interior wood products such as kitchen cabinetry and furniture

VOC compliance limits vary from state to state; please consult local Air Quality rules and regulations.

An Environmental Data Sheet is available from your local Sherwin-Williams facility or at www.paintdocs.com

CHARACTERISTICS

Gloss (measured on black glass):


| | |
|-------|-------------|
| Gloss | 85+ units |
| BRE | 55-59 units |
| MRE | 34-38 units |
| DRE | 17-21 units |

Volume Solids: 18 ± 2%

Weight Solids: 25 ± 2%

Viscosity:

22-27 seconds #2 Zahn Cup

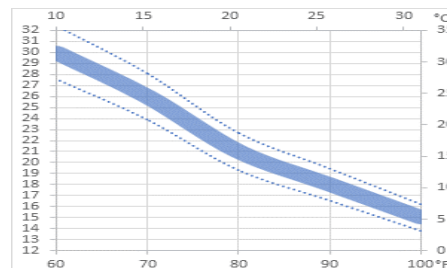

The above chart is for information only and should not be used as product specifications

Recommended film thickness per coat:

Mils Wet 4.0-6.0 Mils Dry
0.7-1.1

Spreading Rate (no application loss)

233-458 sq ft/gal @ 0.7-1.1 mils DFT

Drying (77°F, 50% RH):

| | |
|------------|---|
| To Sand: | 30-40 minutes |
| To Recoat: | 30-40 minutes To Pack: |
| To Rub: | Overnight |
| Force Dry: | 4 hours |
| | flash 10 minutes, then 10-15 minutes at 110-140°F; air dry 2 hours before packing |
| | 4°F PMCC |

Flash Point:

Mixing Ratio:

1 gallon Acrylic Conversion Ctg
4 oz. Catalyst V66V26

Pot Life:

24 months uncatalyzed,
6 months catalyzed

Air Quality Data (Theoretical):

- Non-photochemically reactive
- Volatile Organic Compounds (VOC) as packaged, maximum:
5.65 lb/gal, 678 g/L
- Hazardous Air Pollutants (HAPS): as packaged, maximum:
0.0 lbs per lb of solids

SPECIFICATIONS

Surface preparation

Wood - New Work (interior only):

Must be clean, dry, and finish sanded. Substrate should be free of grease, oil, dirt, fingerprints, and any contamination to ensure optimum adhesion and coating performance properties. Moisture content of wood should be 6 to 8%.

Previously finished wood (interior only):

Strip old finishes completely and remove all contaminants from the surface. Make sure surface is dry. Finish as new work

Wood Finishing System

1. Color wood—stain or tone as desired and dry thoroughly.
2. Seal—Apply Acrylic Conversion Coating as a sealer, or Sher-Wood Fast Dry Vinyl Sealer T67F6 catalyzed or Vinyl Sealer T67F3 catalyzed. (Consult Corresponding Data Pages for details.) Spray a full wet coat. Air Dry 30 minutes.
3. Sand with 240 grit or equivalent, remove sanding dust.
4. Topcoat—Spray a full wet coat of Acrylic Conversion Coating at 4.0-6.0 mils wet.
5. For more depth or build apply an additional coat. **Do not exceed 4.0 mils DFT for the total system.**

Note: When using Sher-Wood Vinyl Sealer under the Sher-Wood Acrylic Conversion Coating, the vinyl sealer **MUST** be catalyzed. Reference corresponding vinyl sealer data pages for details.

Testing: The information, data, and recommendations set forth in this Product Data Sheet are based upon test results believed to be reliable. However, due to the wide variety of substrates, substrate properties, surface preparation methods, equipment and tools, application methods, and environments, the customer should test the complete system for adhesion, compatibility and performance prior to full scale application.

APPLICATION

Typical Setups

THIS PRODUCT REQUIRES CATALYZATION FOR PROPER PERFORMANCE, DETERMINE IF IT HAS BEEN CATALYZED BEFORE USING. Pot life after catalyzation is 6 months. Record the catalyzation date on the sticker on the container.

Reduction: Acrylic Conversion Coating is formulated to be ready to spray following the addition of catalyst.

Should reduction be required use good quality lacquer thinner such as R7K305 to thin. R7K305 can be used to maintain a HAPS free formula. Solvents such as Acetone R6K9 or n-Butyl Acetate R6K18 can also be used to reduce. Acetone is a very fast solvent that is listed as non-VOC. N-Butyl Acetate is a medium speed reducing solvent. Reducers and the listed solvents can be added at 5-20% to maintain viscosity or reduce solids.

Retard: To retard use PM Reducer R6K34 as moderate speed retarder, MAK R6K30 as a slightly slower retarder, and EEP Reducer R6K35 as a slow retarder. Add between 2-10% to desired dry.

Note: Stainless steel spray equipment must be used.

Conventional Spray:

Air Pressure..... 35-60 psi

Fluid Pressure 6-10 psi

Airless Spray:

Pressure1500-1800 psi

Tip011-.013

Air Assisted Airless:

Assist Air Pressure 20-30 psi

Fluid Pressure 500-900 psi Tip

.....011-.013

HVLP:

Gun.....Binks Mach 1

Atomizing Air Pressure at the Cap.9 psi

Fluid Pressure12 psi

Cap/Tip.....97AP Blue Max/94

Cleanup:

Clean tools/equipment immediately after use with HAPS Compliant Lacquer Thinner, R7K320. Lacquer Thinner R7K120 and R7K22 may also be used, but are not HAPS compliant.

Follow manufacturer's safety recommendations when using any solvent.

All trademarks are the property of their respective owners.

SPECIFICATIONS

Product Limitations:

- For interior use only.
- This product **must be catalyzed** with 3.1% V66V26 by volume or 4.0 ounces catalyst per gallon of coating for proper drying and development of resistance properties. Excess catalyst detracts from film properties.
- Do not use product that has been catalyzed over 6 months, performance properties will not develop.
- Do not subject catalyzed material to iron, brass or aluminum. Exposure to these will discolor Sher-Wood Acrylic Conversion Coating and can affect cure. Store catalyzed material in stainless, plastic or lined containers. Stainless steel spray equipment must be used.
- To achieve maximum performance properties a minimum of 2 mils DFT is required. **Do not exceed 4.0 mils DFT for the total system.**
- Non-yellowing is relative, not absolute terminology. This quality formulation provides UV resistance superior to most standard type nitrocellulose containing precatalyzed lacquers, CAB Acrylic lacquers, and water white varnishes that do not contain UV absorbers.
- Sher-Wood Acrylic Conversion Coating will provide good UV protection in general home and office environments. Should your application be in extreme light environments consult your Sherwin Williams representative prior to using.
- Maximum cure and chemical resistance properties are attained 14 days after finishing in an air dry environment.
- For optimum UV/Non-yellowing properties, apply Acrylic Conversion Coating as a self-seal system.
- Natural finished wood will change color on aging and exposure to light. This is a natural phenomenon. Clear finishes will not prevent the wood from changing color.
- May be used as a shading lacquer or toner by adding OptiColor® XP or GIS colorants up to 2 ounces per gallon.

CAUTIONS

FOR INDUSTRIAL SHOP APPLICATION ONLY

Thoroughly review product label and Safety Data Sheet (SDS) for safety information and cautions prior to using this product.

To obtain the most current version of the Environmental Data Sheet (EDS), Product Data Sheet (PDS), or Safety Data Sheet (SDS) please visit your local Sherwin-Williams facility or www.paintdocs.com.

Please direct any questions or comments to your local Sherwin-Williams facility

Note: All purchases of products from Sherwin-Williams are exclusively subject to Sherwin-Williams' terms and conditions of sale which can be found [by following this link \(click here\)](#). Please review these terms and conditions prior to the purchase of the products.

Sherwin-Williams warrants the product to be free of manufacturing defect in accordance with Sherwin-Williams' quality control procedures. Except for the preceding sentence, due to factors that are outside of Sherwin-Williams' control, including substrate selection, and customer handling, preparation, and application, Sherwin-Williams cannot make any other warranties related to the product or the performance of the product. **SHERWIN-WILLIAMS DISCLAIMS ALL WARRANTIES OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE IMPLIED WARRANTY OF MERCHANTABILITY, THE IMPLIED WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE.**

Liability for products proven to be defectively manufactured will be limited solely to replacement of the defective product or the refund of the purchase price paid for the defective product, as determined by Sherwin-Williams. Under no circumstances shall Sherwin-Williams be liable for indirect, special, incidental or consequential damages, lost profits or punitive damages arising from any cause whatsoever