



DRY LUBRICANT



LUBRICANTS



SPRAYON® DRY GRAPHITE LUBE

- Works up to 850°F/1000°F intermittently
- Dries rapidly
- Excellent conductivity
- Coefficient of friction, .123



CLEANERS, DEGREASERS
LUBES AND SEALANTS


SUPERIOR
LUBRICANTS

PAINTS, COATINGS
AND PRIMERS

CAULKS, SEALANTS
AND ADHESIVES

BRUSHES, ROLLER COVERS
AND ACCESSORIES

Sprayon® Dry Graphite Lube is a high lubricity graphite that adheres to most surfaces with minimum surface preparation. It air dries rapidly at room temperature to provide clean, long-wearing lubrication. This lube is also conductive and may be used where lubrication and electrical properties are both required. Effective in temperature up to 850°F. constant and 1000°F. intermittent. Low friction coefficient (.123) allows parts to move easily.

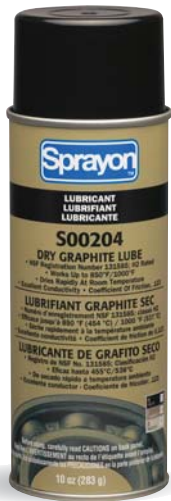

PROPERTIES

APPEARANCE: Black

ODOR: Mild solvent

PROPELLANT: Hydrocarbon

WT./GAL.: 5.23

SPECIFIC GRAVITY: 0.63

PAINTABLE: No

% VOC AEROSOL: 99.05%

V.O.C. COMPLIANT CALIFORNIA: Yes

V.O.C. COMPLIANT OTC STATES: Yes

FLAMMABLE: Yes

FLASH POINT: <0°F

HAZARD RATING: 2,4,0

SHELF LIFE: 3 years from date of manufacturer.

PERFORMANCE

PLASTIC SAFE: No

TEMPERATURE RANGE:

LOW: -40°F

HIGH: 850°F constant (1,000°F) intermittent

LOAD CAPACITY: Extreme Pressure

COEFFICIENT OF FRICTION

(ASTM D-4518): .123

- NSF Registration Number 131585; H2 Rated
- Penetrant
- Water-Displacer
- Rust Inhibitor

USES

- Pre-assembly lubrication of moving parts
- Mechanisms of vending machines and parking meters

- Automotive and industrial gaskets
- Bearings
- Springs
- Bushings
- Chains
- Locks
- Gaskets

APPLICATION

Maximum performance is achieved when the metal surfaces to be protected are clean, dry and free of rust, oil and mill scale.

Aerosol Application: Product should be sprayed in a well ventilated area. Sprays best at room temperature. Shake well before using. Spray at a distance of 10" to 12" from surface.

PACKAGING

Stock #: S00204

UPC Code: 0-75577-90204-0

Fill Wt.: 10 oz.

Per Case: 12

Carton Dimensions:

L 11.13" x W 8.44" x H 8.38"

SHIPPING

Refer to section 14 of the material safety data sheet for proper transport information and labeling.

RESOURCES

MSDS/EDS/PRODUCT DATA

SHEETS: www.KPG-Industrial.com

CUSTOMER SERVICE:

1-800-777-2966

TECHNICAL INFORMATION:

1-800-251-2486



Nonfood Compounds
Program Listed (H2 Rated)
(Registration #131585)

Distributed By:



INDUSTRIAL

Krylon Products Group
101 Prospect Ave. NW
Cleveland, OH 44115
www.KPG-Industrial.com
Tel: 1-800-777-2966