

MOLD RELEASE

# MOLD PROTECTANT



## MR™ 361



Product base is wax



Protectant Longevity: Medium 15 mos.



HMIS Hazard Rating:  
Health (2) • Flammability (4) • Reactivity (0)

- Prevents rust and contamination
- Non-staining formula
- Excellent humidity resistance
- Excellent for outdoor storage



PRESERVE. PROTECT. PREVENT.™

Sprayon® MR™ 361 Mold Protectant is a firm, non-tacky corrosion inhibitor. It provides long-term protection against rust and contamination. This wax-based protectant will not penetrate into pin areas and cause part rejections. Its clear opaque-like color helps determine coverage. All that is needed is a thin coat.

## USES

- As a protective barrier on all metal molds and dies, including plastic, rubber, die-casting, stamping, drawing and fine blanking
- Indoor/outdoor protection on tools, dies, gauges and molds during storage and shipment



MR361

© 2010 Sprayon® Products Made in U.S.A.

## MOLD RELEASE

### APPLICATION

Product should be sprayed in a well ventilated area. Sprays best at room temperature (70°F). Shake can well before using. Hold can 10" to 12" from mold surface and spray a thin, light coating. To use entire contents, hold spray-head, then rotate can. For a nonabrasive, fast and effective way to clean all metal molds, use Sprayon® MR™351 Mold Cleaner.

### PERFORMANCE

- PAINTABLE: No  
HUMIDITY CABINET TEST (ASTM D-1748):  
60 hrs. @ 120°F - pass  
GOVERNMENT SPECIFICATIONS: MIL-C-16173 grade 2
- NSF Registration Number 127701; H2 Rated
  - Non-staining formula
  - Prevents rust and contamination
  - Resists humidity, condensation & fingerprints
  - Does not harden or crack with age
  - Excellent for outdoor storage

### PACKAGING

STOCK #: S00361  
UPC CODE: 0-75577-90361-0  
FILL WT.: 13 oz.  
PER CASE: 12  
CARTON DIMENSIONS:  
L 11.13" x W 8.44" x H 9.94"

### SHIPPING


Refer to section 14 of the material safety data sheet for proper transport information and labeling.

### PROPERTIES

APPEARANCE: Clear film  
ODOR: Light solvent  
PROPELLANT: CO<sub>2</sub>  
WT./GAL.: 7.2  
SPECIFIC GRAVITY: 0.87  
WET/DRY FILM: Dry/Wax Type  
% VOC: 87.40%  
V.O.C. COMPLIANT CALIFORNIA: Yes  
V.O.C. COMPLIANT OTC STATES: Yes  
FLAMMABLE: Yes  
FLASH POINT: <0 °F  
HAZARD RATING: 2,4,0  
SHELF LIFE: 3 years from date of manufacture

### RESOURCES

MSDS/EDS/PRODUCT  
DATA SHEETS: [sprayon.com](http://sprayon.com)  
CUSTOMER SERVICE: 1-800-777-2966  
TECHNICAL INFORMATION: 1-800-251-2486

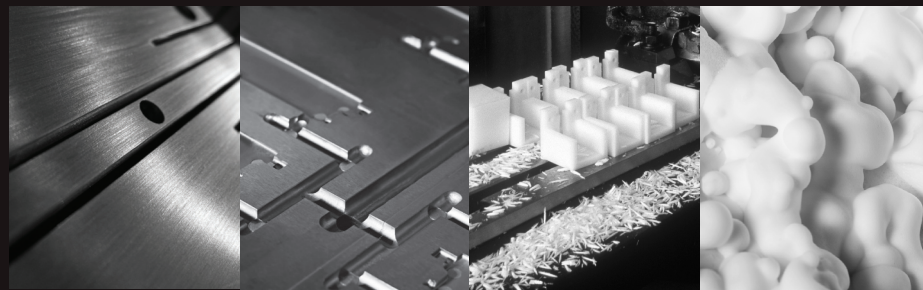

Distributed by:



**Sprayon® Products**  
101 Prospect Ave. NW  
Cleveland, OH 44115  
[Sprayon.com](http://Sprayon.com)  
1-800-777-2966

310-PDS-MR361