

WELDING

STAINLESS STEEL COATING



WL™ 738

PREVENTS CORROSION™

Corrosion Preventative

32% STAINLESS STEEL DRY FILM

32% Stainless Steel pigment in dry film

316L PIGMENT TYPE STAINLESS STEEL

Pigment Type: 316L Stainless Steel

MAX TEMP 400°F/204°C

Maximum operational temperature: 400 °F (204 °C)

QUICK DRY 10 MIN.

Dry to touch time: 10 minutes.

EZ TOUCH®

Features EZ-TOUCH® comfort nozzle

H 2 F 3 R 1

HMIS Hazard Rating: Health (2) • Flammability (3) • Reactivity (1)

- Contains stainless steel
- Covers weld discoloration
- Works up to 400°F
- Quick dry formula

Sprayon™ PRESERVE. PROTECT. PREVENT.™

Sprayon® WL™ 738 Stainless Steel Coating is formulated with 100% type 316L stainless steel pigment for maximum corrosion resistance on stainless steel, copper and other metals. Dries quickly to a satin sheen, hardens overnight and cures to optimum strength in several days. Withstands temperatures up to 400°F.

WELDING

USES

- Exhaust pipes
- Mufflers
- Production equipment
- Furnaces
- Steam pipes
- Radiators
- Plumbing fixtures
- Engines



WL738

© 2010 Sprayon® Products Made in U.S.A.

SURFACE PREPARATION

Surface must be free of grease, rust, dirt and wax. Product should be sprayed in a well-ventilated area. Use at room temperature (70°F). Shake well before using. Spray 6" to 8" from surface. Move can with short "dusting" strokes, allowing paint to become tacky between light mist coats. Recoat within one hour to avoid lifting or wrinkling of the paint. After completing job, clean valve by holding can upside down and spray until no more paint comes out.

PERFORMANCE

- Equipped with DanVern™ standard valve
- Excellent adhesion to stainless steel, copper and other metals
- Easy cover for weld discolorations

DRY HEAT RESISTANCE: 400 °F

DRYING TIME @ 70°F @ 50%R.H.

TO TOUCH: 10-15 minutes

TO HANDLE: 24 hours

RECOAT: 1 hour or after 24 hours

CLEAN UP: Acetone

PACKAGING

STOCK #: S00738

UPC CODE: 0-75577-90738-0

FILL WT.: 12 oz.

PER CASE: 12

CARTON DIMENSIONS:

L 11.13" x W 8.44" x H 8.38"

SHIPPING

Refer to section 14 of the material safety data sheet for proper transport information and labeling.

PROPERTIES

RESIN TYPE: Polyurethane

APPEARANCE: Stainless steel

PROPELLANT: Hydrocarbon blend

SHEEN: Satin

% SOLIDS: 16.30%

PIGMENT: 100% Type 316L Stainless Steel

WT./GAL.: 6.34

SPECIFIC GRAVITY: 0.76

% VOC: 48.70%

MIR: 1.46

V.O.C. COMPLIANT CALIFORNIA: Yes

V.O.C. COMPLIANT OTC STATES: Yes

FLAMMABLE: Yes

FLASH POINT: <0°F

HAZARD RATING: 2,3,1

RECOMMENDED FILM THICKNESS: 1.5 - 3.0

COVERAGE PER AEROSOL (THEORETICAL):

10-15 sq. ft. per can

SHELF LIFE: 3 years from date of manufacture


RESOURCES

MSDS/EDS/PRODUCT DATA

SHEETS: sprayon.com

CUSTOMER SERVICE: 1-800-777-2966

TECHNICAL INFORMATION: 1-800-251-2486

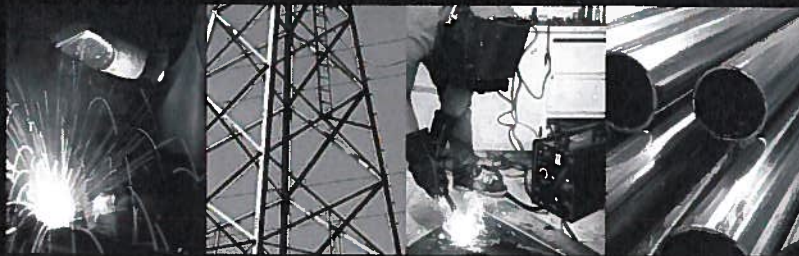

Distributed by:

PRESERVE. PROTECT. PREVENT.



Sprayon® Products

101 Prospect Ave. NW

Cleveland, OH 44115

Sprayon.com

1-800-777-2966

310-PDS-WL738