
**LUBRICANTS** 





**LU**<sup>™</sup>905

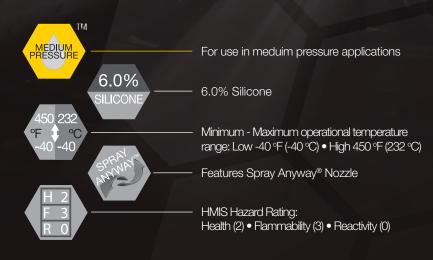

- Formulated Without Methylene Chloride
- Non-Staining
- Works from -40°F to +450°F
- Reduces Friction and Wear



PRESERVE. PROTECT. PREVENT.

Sprayon®LU™905 Heavy Duty Silicone Lubricant contains a heavy concentration of high viscosity silicone which will withstand medium loads and pressures. Sprayon's formula reduces wear and friction in applications from -40°F to 450°F (-40°C to 232°C). This lubricant penetrates the surface and provides a continuous non-staining film that repels dust and dirt. Use on all metals, rubber and some plastics to stop squeaks and help protect from corrosion.

### **USES**

- High wear areas
- Slides
- Locks
- Dissimilar metals
- Slitters
- Bushings
- Conveyors
- Air Tables
- Knives
- Guides
- Moving parts
- Rubber items





LU905

# **LUBRICANTS**

### APPLICATION

Maximum performance is achieved when the metal surfaces to be protected are clean, dry and free of rust, oil and mill scale. Product should be sprayed in a well ventilated area. Sprays best at room temperature. Shake well before using. Spray at a distance of 10" to 12" from surface. NOTE: May harm certain plastics (styrene or urethane types), elastomers and air-dried painted surfaces. Test product on non-essential similar material prior to application.

## **PERFORMANCE**

PLASTIC SAFE: No **TEMPERATURE RANGE: LOW: -40°F** HIGH: 450°F

LOAD CAPACITY: Medium

- Penetrant
- Water-Displacer
- Rust Inhibitor
- Equipped with an extension tube for hard-to-reach areas

## **PROPERTIES**

APPEARANCE: Clear amber **ODOR**: Chlorinated PROPELLANT: Hydrocarbon

WT./GAL.: 6.36 **SPECIFIC GRAVITY: 0.77** VISCOSITY: High **PAINTABLE:** No % VOC Aerosol: 50%

V.O.C. COMPLIANT CALIFORNIA: Yes V.O.C. COMPLIANT OTC STATES: Yes

FLAMMABLE: Yes FLASH POINT: <0°F HAZARD RATING: 2,3,0

SHELF LIFE: 3 years from date of manufacture

### **PACKAGING**

Stock #: S00905000 UPC Code: 0-75577-75874-6

Fill Wt.: 12 oz. Per Case: 12 **Carton Dimensions:** L 11.13" x W 8.44" x H 8.38"

### **SHIPPING**

Refer to section 14 of the material safety data sheet for proper transport information and labeling.

# **RESOURCES**

MSDS/EDS/PRODUCT DATA SHEETS: sprayon.com **CUSTOMER SERVICE:** 1-800-777-2966 TECHNICAL INFORMATION: 1-800-251-2486



© 2010 Sprayon® Products Made in U.S.A.



Distributed by:



Sprayon® Products

101 Prospect Ave. NW Cleveland, OH 44115 Sprayon.com 1-800-777-2966