

Group	619 – Polyester High Durable
Curing	min: 180°C @ 20' to 30' max: 200°C @ 10' to 13'
Surface	Fine Texture
Gloss	Visual matt
Approvals	Qualicoat class 2 category 1 (licence P-0987) GSB Florida 3 Quality (licence 152j)

PRODUCT DESCRIPTION

PE/P/HD FTX is a fine texture effect, superdurable thermosetting polyester powder coating delivering superior resistance to UV radiation and outdoor weathering.

PE/P/HD FTX was created to protect and decorate aluminium and galvansied steel components used in fenestration projects in high UV/tropical climates.

Typical uses include door and window frames, balconies, curtain walling, cladding and roofline products.

PE/P/HD FTX provides a high level of gloss and colour retention for Agricultural and Construction Equipment increasing the resale value of these vehicles.

Storage Life:

Store at temperatures lower than 30°C. Storage life in original package: 24 months.

CHARACTERISTICS

Spec. Gravity (kg/l): 1,25 – 1,70
DFT (micron): 60 - 80
Theoretical Coverage @60um: 12 m²/kg

Recommended film thickness:

Dry: 60 - 80 µm

Reaction To Fire EN 13501-1


Classification: A2-s1, d0

APPLICATION

Suitable for automatic and manual electrostatic application
Please contact your Sherwin-Williams representative to discuss tribo-static application

Curing Cycle

Time	Substrate temperature
10-13 min	200°C
15-25 min	190°C
20-30 min	180°C

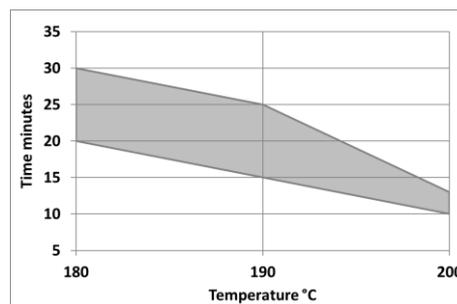

CHEMICAL RESISTANCE

Immersion testing for 48 hours at ambient temperature:

Chemical	Effect
hydrochloric acid 10 %	No change
Nitric acid 30 %	matt, but washing off
Sulphuric acid 10%	No change
hydrogen peroxide 40 vv	No change
ammonium hydroxide 10%	No change
ammonium hydroxide 33 %	No change
sodium hydroxide 5%	No change
tartaric acid 5%	No change
citric acid 5%	No change
lactic acid 5%	No change
ethanol	No change
N-butanol	No change
petroleum ether	slightly softened

SUBSTRATE PREPARATION

The surface treatment should be chosen according to the type of substrate and the required performance.

The surface to be coated must be free from oxidation, oil, grease or any other form of contamination.

A good quality pretreatment process is recommended for optimum performance, certified products can be found via Qualicoat, GSB or Qualisteelcoat.

Final user should select the proper pretreatment based on corrosion resistance performance.

Where required, the corrosion resistance can be enhanced using a primer system.

Pretreatment	Substrate				
	Aluminum	Steel	Galvanized Steel	Metallized Steel	Steel
Chemical	Cr-free (Zr, Ti, Oxilanes or alternatives)	✓		✓	
	Pre-anodising	✓			
	Chromate	✓		✓	
	Phospho-chromate	✓			
	Iron phosphate		✓		
	Zinc phosphate		✓	✓	
	Nano-ceramic		✓		
Mechanical	Sand blasting		✓		
	Soft blasting			✓	✓
	Sweeping			✓	✓

PERFORMANCE DATA

A 60 µm coating applied to a test panel (ALQ-36) cured 20 minutes at 180°C satisfied the following requirements,

Gloss 60° :

5.0 - 15.0

UNI EN ISO 2813:2014

Buchholz indentation test:

more than 90

UNI EN ISO 2815

Pendulum-rocker hardness :

Persozendulum

more than 300

UNI EN ISO 1522

Erichsen cupping test (mm):

more than 5

UNI EN ISO 1520

Direct impact test (cm.Kg):

more than 25

ASTM D 2794; ISO 6272-2:2002

Reverse impact test(cm.kg):

more than 25

ASTM D 2794; ISO 6272-2:2002

Conical mandrel : Bend test

Maximum 20mm

Crosscut adhesion (2mm) (GT):

Class 0

UNI EN ISO 2409

Acetic salt fog test : according to Qualicoat and GSB International Requirements P/CM230 Resistance to humidity : (Humidity test) 1000 hours later – no blistering, indentation along the cross of maximum 1

Resistance to humidity:

(Humidity test) 500 hours

no change

UNI EN ISO 6270-2:2005??

Accelerated Weathering:

ISO 16474-2 Method A (daylight filters) –

Cycle 1 1000hrs, >90% retained gloss

Florida Weathering:

3 years 5° south facing

>50% Retained gloss

CAUTION

FOR INDUSTRIAL SHOP APPLICATION

Thoroughly review product label and Safety Data Sheet (SDS) prior to using this product.

A Safety Data Sheet is available from your local Sherwin-Williams facility or distributor

Note: Product Data Sheets are periodically updated to reflect new information relating to the product. It is important that the user obtain the most recent Product Data Sheet for the product being used. The information, rating, and opinions stated here pertain to the material currently offered and represent the results of tests believed to be reliable. However, due to variations in user handling and methods of application which are not known or under our control, The Sherwin-Williams Company cannot make any warranties as to the end result.