



**GUTTER | ROOF**

**BUTYL RUBBER CAULK**




White Lightning® Butyl Rubber Caulk is a high performance product that is ideal for sealing exterior gutters, corrugated roofing, pipes, aluminum and vinyl siding, lap joints, flashing, roof vents and drain spouts. Provides a watertight seal for areas exposed to the elements. For use on: aluminum/metal, concrete, mortar, plastics, rubber, stone, vinyl and wood.


- Provides a Watertight Seal
- Remains Flexible in Temperature Extremes



PART #	UPC	Color	SIZE
W43400010	0-23275-00114-5	White	10 fl oz

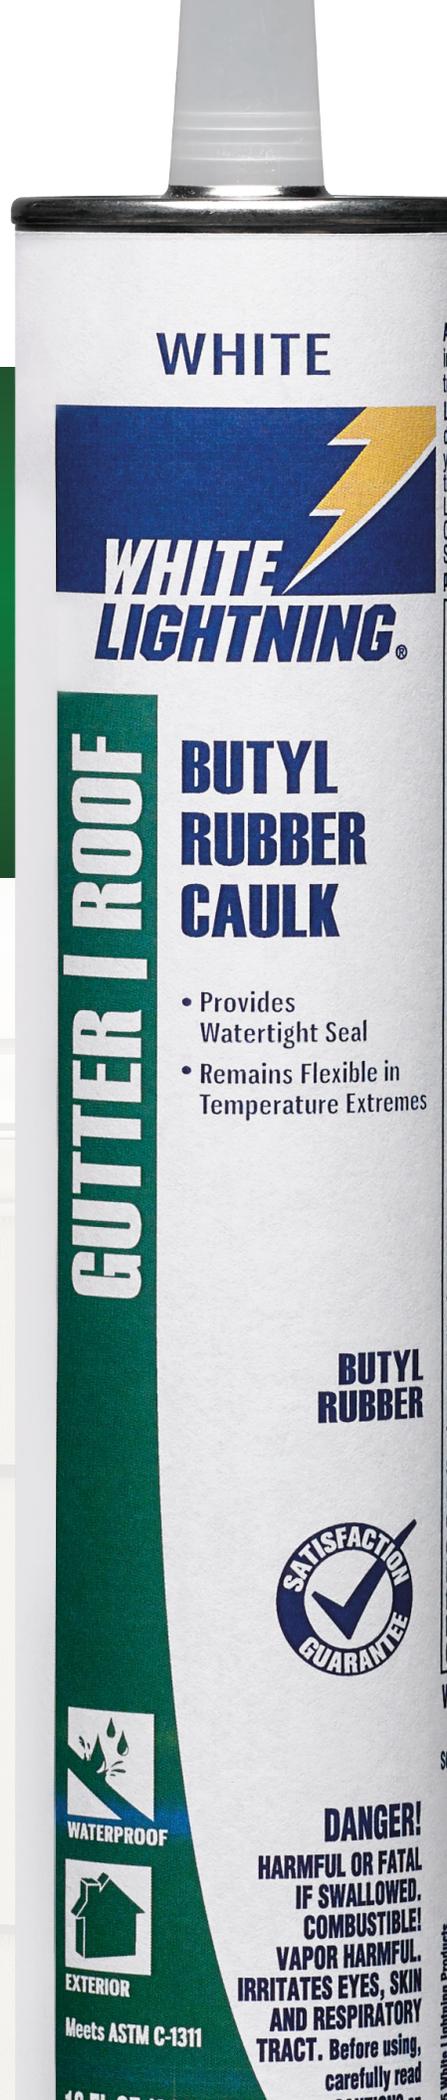

WHITE

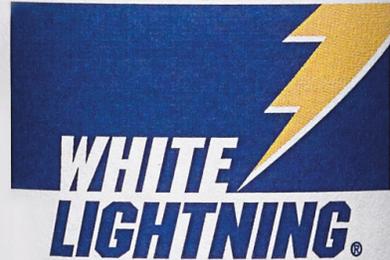

**GUTTER | ROOF**

**BUTYL RUBBER CAULK**

- Provides Watertight Seal
- Remains Flexible in Temperature Extremes

**BUTYL RUBBER**



Meets ASTM C-1311

**DANGER!**  
 HARMFUL OR FATAL IF SWALLOWED.  
 COMBUSTIBLE!  
 VAPOR HARMFUL. IRRITATES EYES, SKIN AND RESPIRATORY TRACT. Before using, carefully read...

**Product Description:**

White Lightning® Butyl Rubber Caulk is a high performance product that is ideal for sealing exterior gutters, corrugated roofing, pipes, aluminum and vinyl siding, lap joints, flashing, roof vents and drain spouts.

Provides a watertight seal for areas exposed to the elements. For use on: aluminum/metal, concrete, mortar, plastics, rubber, stone, vinyl and wood.

**Physical Properties:**

**Type:** Butyl Rubber

**Colors:** White

**Shelf Life:** 12 Months

**Flash Point:** 105° F

**Flammability:** Combustible

**Full Cure Time:** 21 Days

**Tack Free Time:** 2 Hours

**Application Temperature:** 40° F to 120° F

**Service Temperature:** -20°F to 200°F

**Vehicle:** Solvent Release Butyl

**Solids by Weight:** 80%

**Weight/Gallon:** 11 lbs/gal

**Painting:** Painting is unnecessary, but if desired, can be done after curing for one week.

**Primers:** Not required

**Application:**

1. Remove all existing caulk
2. Clean thoroughly to remove all loose material, grease, dirt, oil, wax, loose paint, dust and soap film.
3. Remove mold/mildew with bleach (4:1 mix, water to bleach), and detergent that does not contain ammonia. Rinse surfaces and allow to dry.

**10oz cartridge**

- Cut tip at 45° angle.
- Puncture inner seal.
- Load cartridge into caulk gun.
- Squeeze trigger to start flow of caulk and work caulk into joint.
- Smooth caulk with proper tool.

**Clean Up:**

Mineral spirits, promptly clean tools and excess caulk; wash hands with soap and water.

**Cautions:**

See SDS

**LIMITED WARRANTY:**

If when applied according to label directions within one year from date of purchase this product fails to perform to your satisfaction, as your sole remedy we will replace the product at no cost or refund the original purchase price with proof of purchase. Labor or costs associated with labor not included. THIS WARRANTY IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING MERCHANTABILITY, WHICH ARE ALL DISCLAIMED AND/OR LIMITED IN DURATION TO THE EXTENT PERMITTED BY LAW. WE SHALL NOT BE LIABLE FOR INDIRECT, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES (INCLUDING LOST PROFITS) FROM ANY CAUSE WHATSOEVER.

**Performance Data:**

**Joint Size:** 1/8" x 1/8" to 3/8" x 3/8"

**Freeze-Thaw Stability:** N/A

**Shelf Life:** 12 Months

**Clean Up:** Mineral spirits, promptly clean tools and excess caulk; wash hands with soap and water.

**Flexibility:** Good

**Linear Coverage:** 24 ft at 1/4" wide x 1/4" deep bead.

**Painting:** Painting is unnecessary, but if desired, can be done after curing for one week.

**ASTM:** Meets ASTM C-1311

**For more information please call or write:**

White Lightning® Products | 101 Prospect Ave. NW | Cleveland, OH 44115  
1-800-241-5295 Option 1 Customer Service | 1-800-241-5295 Option 2 Technical Service  
[www.wlcaulk.com](http://www.wlcaulk.com)