



ALL PURPOSE

3006 QUICK DRY™

Siliconized Acrylic Latex Caulk



White Lightning® 3006 Quick Dry™ can be painted in 20 minutes with brush and is paintable immediately with airless sprayer! The full-bodied formula is ideal for filling joints and openings around doors, windows, baseboards, trim, siding and vents. For use on: wood, drywall, metal, glass and masonry.

- Paintable in 20 minutes with brush
- Paintable immediately with airless sprayer
- Good flexibility, crack resistant
- Cured caulk is mold and mildew resistant



PAINTABLE




INTERIOR/
EXTERIOR



WATER
CLEANUP



PART #	UPC	Color	SIZE
W12QD0010	0-23275-00355-2	White	10 fl oz

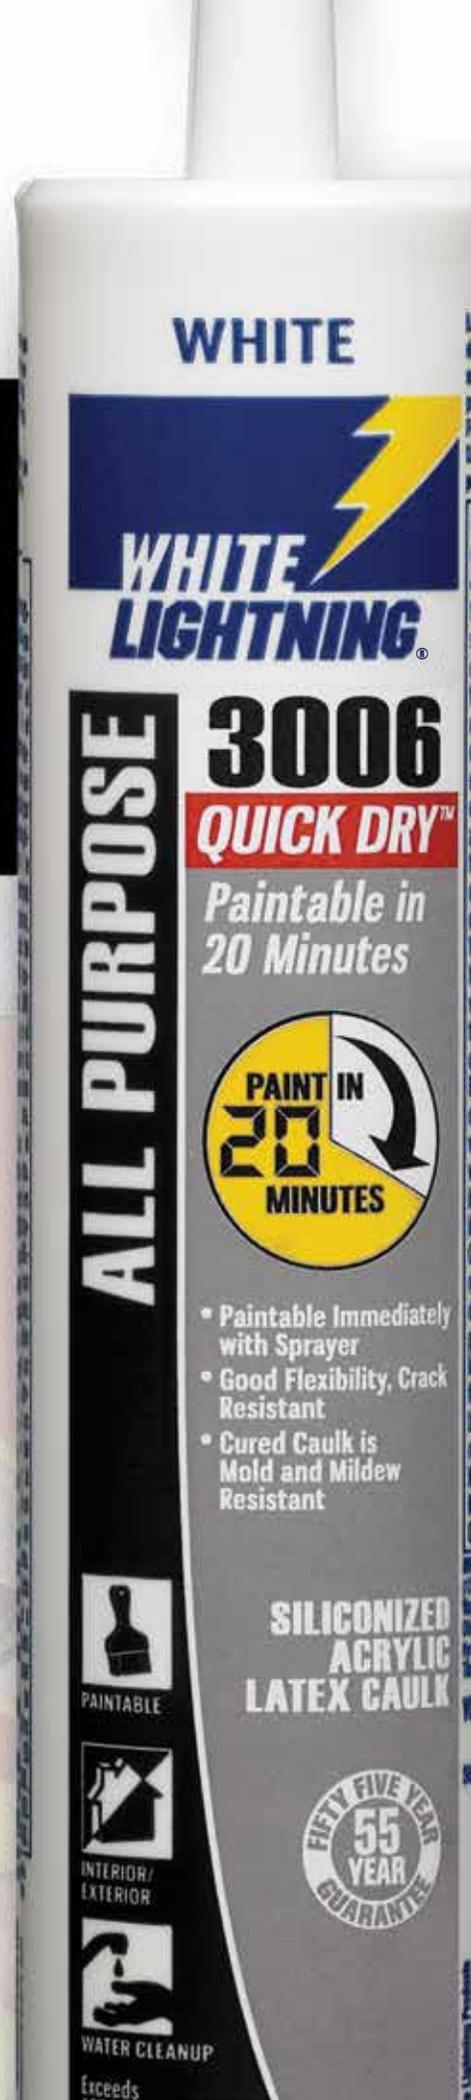

WHITE



**3006
QUICK DRY™**

*Paintable in
20 Minutes*



- Paintable Immediately with Sprayer
- Good Flexibility, Crack Resistant
- Cured Caulk is Mold and Mildew Resistant

**SILICONIZED
ACRYLIC
LATEX CAULK**



PAINTABLE



INTERIOR/
EXTERIOR



WATER CLEANUP

Exceeds



**WHITE
LIGHTNING**®

**ALL PURPOSE
3006 QUICK DRY™**

Product Description:

White Lightning® 3006 Quick Dry™ can be painted in 20 minutes with brush and is paintable immediately with airless sprayer! The full-bodied formula is ideal for filling joints and openings around doors, windows, baseboards, trim, siding and vents. For use on: wood, drywall, metal, glass and masonry.

Physical Properties:

Type: Premium siliconized acrylic polymer

Colors: White

Shelf Life: 24 months

Flash Point: N/A (water based)

Flammability: N/A (water based)

Full Cure Time: 7 Days

Tack Free Time: 10 Minutes

Application Temperature: 40° F to 140° F

Service Temperature: -30°F to 180°F

Vehicle: Water

Type: Acrylic Polymer

Solids by Weight: 83.99 ± 1%

Weight/Gallon: 13.6763 ± 0.68 lb

Painting: Paintable

Primers: Not required

Mildew resistance: Good

Water resistance: Good

Odor: Low

Shrinkage: Low

Performance Data:

Joint Size: 1/8" x 1/8" to 1/2" x 1/2"

Freeze-Thaw Stability: Passes Through 5 Cycles

Shelf Life: 24 Months

Clean Up: Water; promptly clean tools and excess caulk with water or a damp cloth.

Flexibility: Good

Linear Coverage: 10oz cartridge 24ft at ¼" wide by ¼" deep bead

Paintable: Can be painted after 20 minutes with brush; paintable immediately with airless sprayer (75°F and 50% relative humidity). Allow extra dry time during periods of high humidity and/or cool temperatures.

ASTM: Exceeds ASTM C-834

White Lightning® 3006™ Quick Dry™ has achieved GREENGUARD GOLD Certification.

Application:

1. Remove all existing caulk
2. Clean thoroughly to remove all loose material, grease, dirt, oil, wax, loose paint, dust and soap film.
3. Remove mold/mildew with bleach (4:1 mix, water to bleach), and detergent that does not contain ammonia. Rinse surfaces and allow to dry.

10oz cartridge

- Cut cartridge tip 45° angle.
- Load cartridge into caulk gun.
- Squeeze trigger to start flow of caulk and work caulk into joint.
- Smooth caulk with proper tool.

Clean Up:

Water; promptly clean tools and excess caulk with water or a damp cloth.

Cautions:

See SDS

LIMITED WARRANTY:

If when applied according to label directions within one year from date of purchase this product fails to perform to your satisfaction, as your sole remedy we will replace the product at no cost or refund the original purchase price with proof of purchase. Labor or costs associated with labor not included. THIS WARRANTY IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING MERCHANTABILITY, WHICH ARE ALL DISCLAIMED AND/OR LIMITED IN DURATION TO THE EXTENT PERMITTED BY LAW. WE SHALL NOT BE LIABLE FOR INDIRECT, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES (INCLUDING LOST PROFITS) FROM ANY CAUSE WHATSOEVER.

For more information please call or write:

White Lightning® Products | 101 Prospect Ave. NW | Cleveland, OH 44115
1-800-241-5295 Option 1 Customer Service | 1-800-241-5295 Option 2 Technical Service
www.wlcaulk.com