

WHITE LIGHTNING®

PATCH & REPAIR

KNOCK DOWN

Water Based Wall Texture

White Lightning® KNOCK DOWN Wall Texture provides a quick & easy solution to matching original knock down texture on walls with very minimal mess. Available in coarse & fine textures for use on interior walls, drywall, plaster, wood & more.


- Quick & easy spray
- Minimal prep & mess
- Dries in 30 minutes or less

Seamless Touch Up & Repair



Bring product to room temperature prior to application.

1. Make sure the area being repaired & patched is clean & dry.
2. Protect adjacent areas from overspray & other repair products.
3. Complete repairs to walls & wait for proper dry times.
4. Shake can for 2 minutes after ball begins to rattle - repeat can shake for 10 seconds after each minute of use.
5. Practice spraying on scrap material 24" to 36" from surface to determine surface coverage and troweling technique needed to achieve desired knock down pattern. A continuous circular style of spraying is recommended, but can be adapted depending on pattern needed.
6. Wait 1-3 minutes or until texture no longer looks wet; hold knock down trowel knife at 15° angle; lightly move blade down patched area, using just enough pressure to flatten texture - but not remove it.
7. Spray texture onto repaired area - perform trowel knife technique described in step 6.
8. Once dry, add topcoat to match original paint.

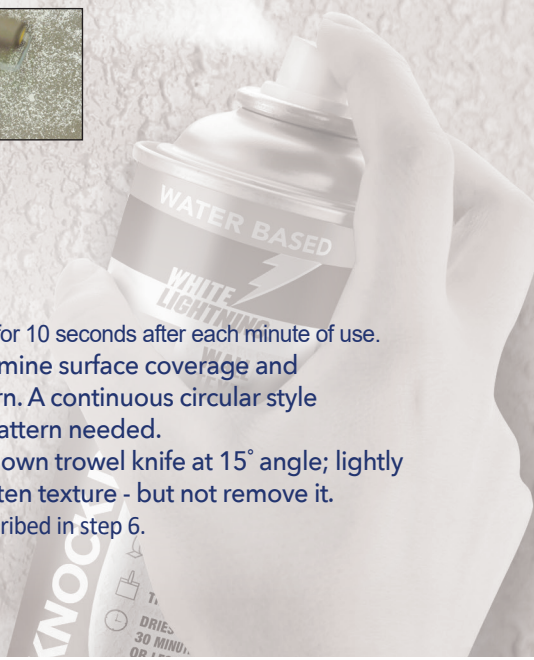



KNOCK DOWN

Water Based Wall Texture

Product Description:

White Lightning® KNOCK DOWN Wall Texture provides a quick & easy solution to matching original knock down texture on walls with very minimal mess. Available in coarse & fine textures for use on interior walls, drywall, plaster, wood & more.

Physical Properties:

Type: Wall Texture

Color: Off White

Shelf Life: 24 months

Flash Point: -20°F

Flammability: Extremely Flammable

Full Cure Time: 1 hour

Tack Free Time: 30 minutes or less

Application Temperature: 68°F to 75°F, <65% humidity

Vehicle: Dimethyl Ether

Solids by Weight: 66.60

Weight: 20 fl. oz.

Primers: Not Required

Performance Data:

Clean Up: Clean paint on tip with warm water; recycle can & cap per local regulations, wash hands with soap & water

Painting: Paintable after 1 hour. Allow extra dry time during periods of high humidity and/or cool temperatures, or heavy applications.

Cautions:

EXTREMELY FLAMMABLE. Keep away from heat, sparks, and open flame. Vapors will accumulate readily and may ignite explosively. Keep area ventilated during use and until all vapors are gone.



PAINTABLE



INTERIOR

PART #	UPC	Texture	SIZE
W5A003000	0-23275-00375-0	Coarse	20.0 fl. oz.
W5A003500	0-23275-00376-7	Fine	20.0 fl. oz.

For more information please call or write:

White Lightning® Products | 101 Prospect Ave. NW | Cleveland, OH 44115
1-800-241-5295 Option 1 Customer Service | 1-800-241-5295 Option 2 Technical Service
www.wlcaulk.com

WL38